



Point Cyclone

Hob with integrated extractor

4125366

Installation Manual










OK!









2-2N: 220-240V - 50/60 Hz - 7.6 kW
2N: 380-415V - 50/60 Hz - 7.6 kW
1N: 220-240V - 50/60 Hz - 7.6 kW
1N: 220-240V - 50/60 Hz - 3.7 kW

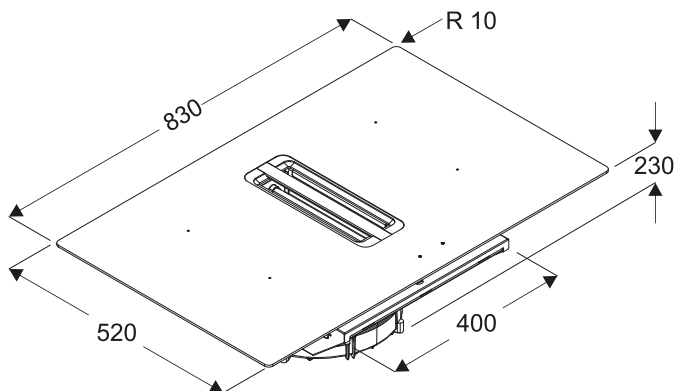

A 1x

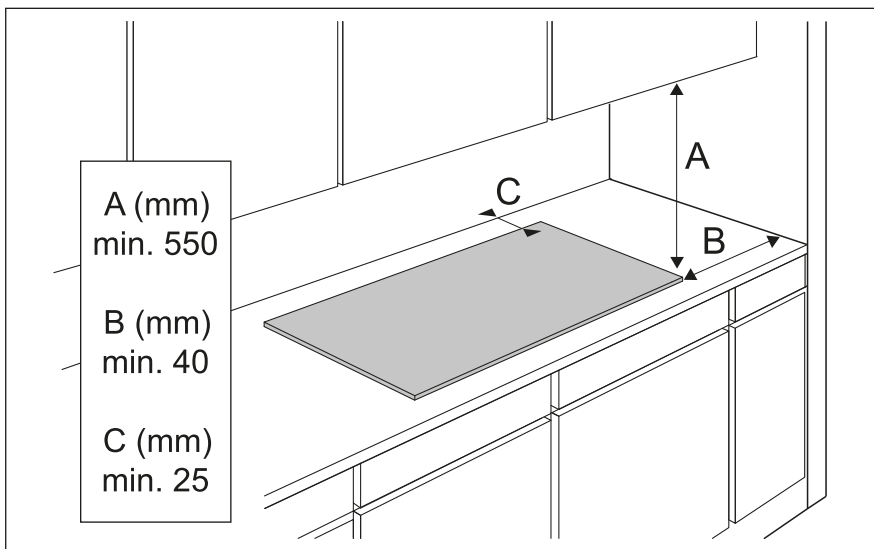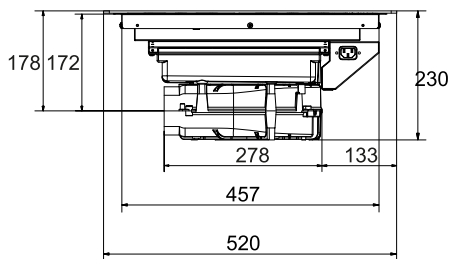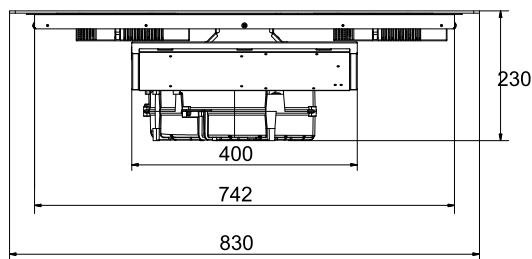

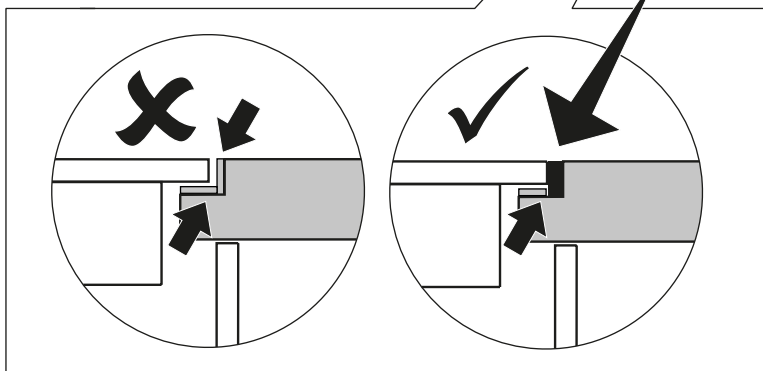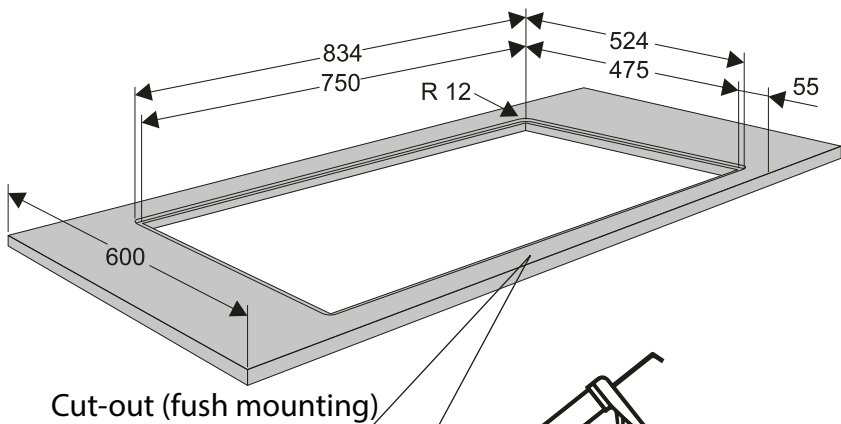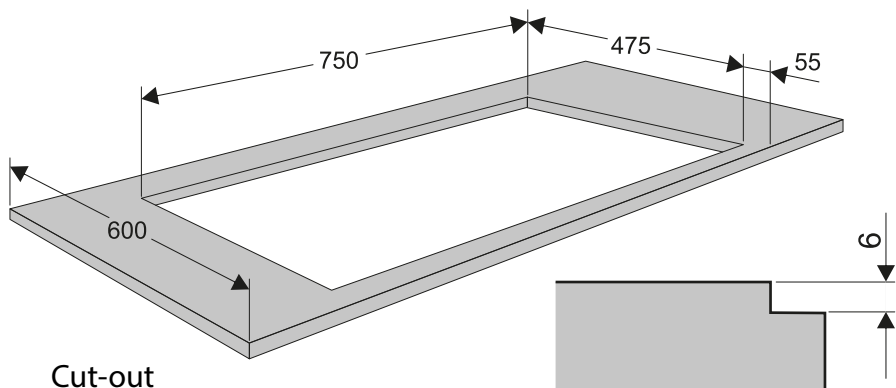

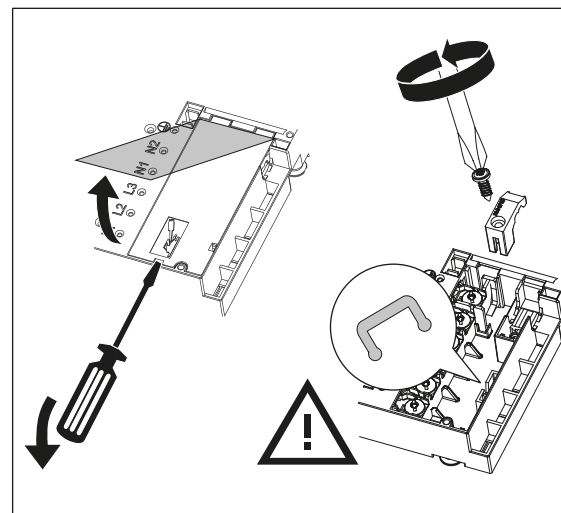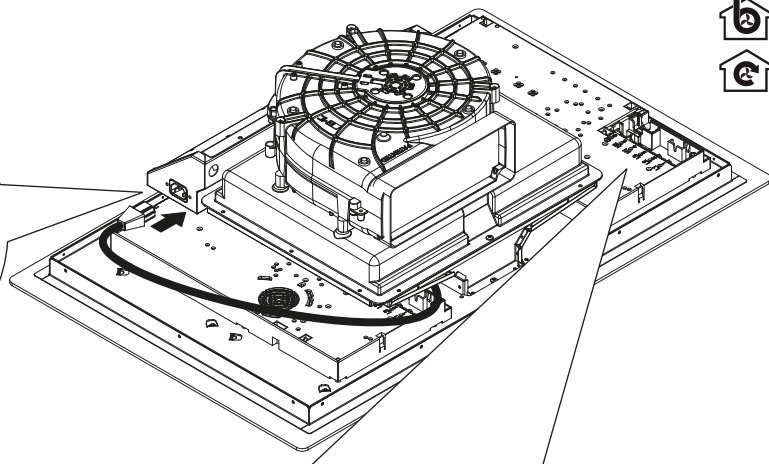


2N 380-415V 50/60Hz - 2x 16A

2 fase - 1 nul
2 phases - 1 neutral
2 Phasen - 1 Nullanschluss
2 phases et 1 neutre

Aderdoorsnede
Aderquerschnitt
Cross sectional area
Fil diamètre

4x2,5 mm²




1N 220-240V 50/60Hz - 1x 32A

1 fase - 1 nul
1 phase - 1 neutral
1 Phase - 1 Nullanschluss
1 phase et 1 neutre

Aderdoorsnede
Aderquerschnitt
Cross sectional area
Fil diamètre

3x4 mm²




1N 220-240V 50/60Hz - 1x 16A

1 fase - 1 nul
1 phase - 1 neutral
1 Phase - 1 Nullanschluss
1 phase et 1 neutre

Aderdoorsnede
Aderquerschnitt
Cross sectional area
Fil diamètre

3x2,5 mm²




Max 3720W

2-2N 230V 50Hz - 2x 16A


2 fase - 2 nulle
2 phases - 2 neutral
2 Phasen - 2 Nullanschlüsse
2 phases et 2 neutres

Aderdoorsnede
Aderquerschnitt
Cross sectional area
Fil diamètre

5x2,5 mm²



only NL/alleen NL

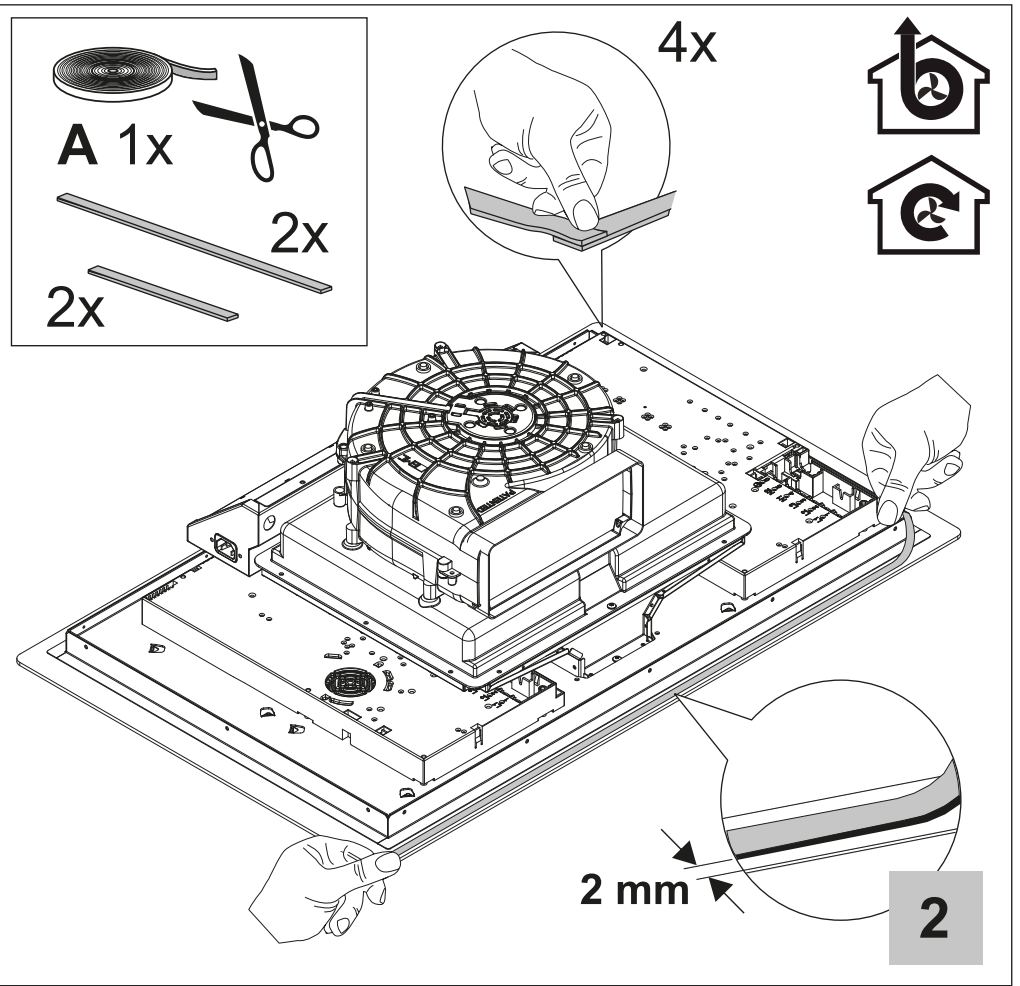






DK

GB


FI

DK

SE

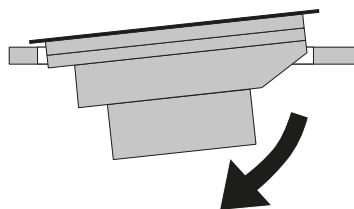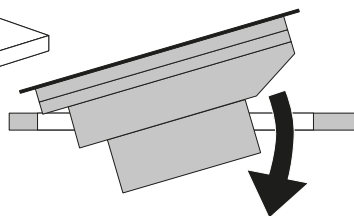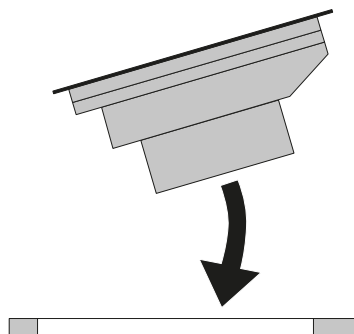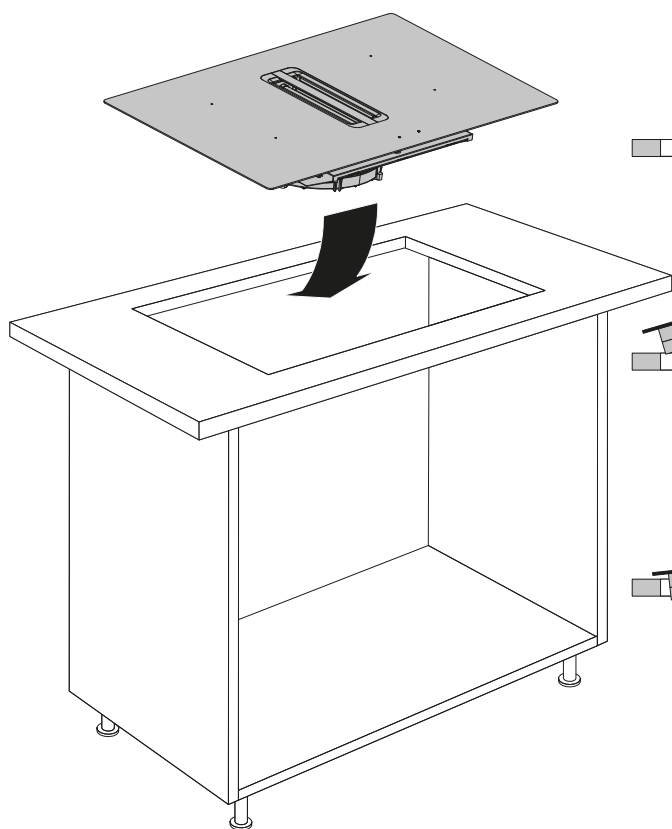

3

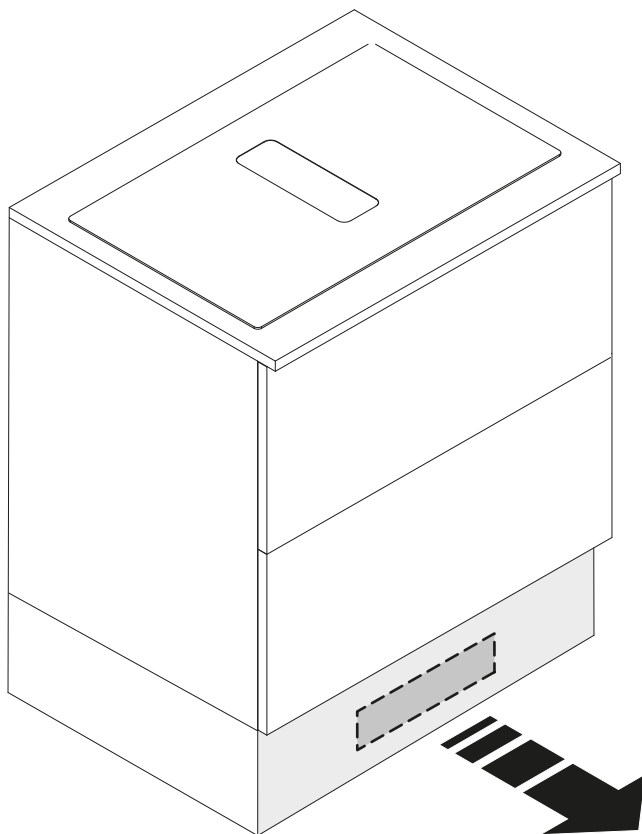

>200cm²

4

DK

GB

FI

DK

SE

